


## Refill Instructions: Canon PG-210 and CL-211 Cartridges

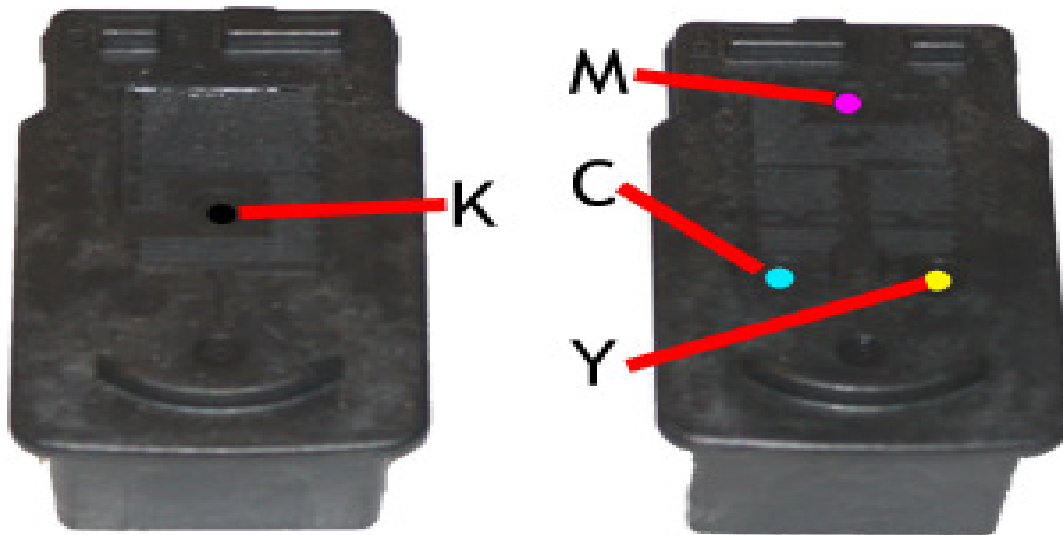

### Refill:

1. Remove label from top of cartridge
2. Using the provided MIS Yellow Tool (drill bit), carefully drill holes in the small holes already present.
3. Tape over all holes except the one you are going to put ink into. Use scotch tape or black electrical tape.
4. Attach needle to syringe and load syringe with 5 cc of ink for color and 10 for black.
5. Set the cartridge on newspaper or paper towel so the print head is in contact with the paper.
6. Insert needle into correct cartridge ink hole. Make sure needle reaches to bottom of cart.

7. SLOWLY inject the ink into the cartridge. Stop if the ink begins to well up from the fill hole.
8. Clean off top of cartridge, un-tape the next fill hole and tape over the one just filled. *This is so you do not get accidental color contamination.*
9. Repeat steps 5, 6, 7 until all colors have been injected.
10. Clean off the top of the cartridge. Place scotch tape over the top of the cartridge so it covers every hole.
11. Use a pin and put a small hole (vent hole) through the scotch tape for each hole on the top of the cartridge.  
**This is important, don't skip this step.** The cartridge must be vented to atmosphere or it will not work.
12. Reinstall cartridges in printer and let the cartridges sit for 4 hours without printing.
13. Print at least 3 purge sheets.
  - a. Purge sheets can be found at <http://www.inksupply.com/purging.cfm>
  - b. Download the .zip file and use 'Purge4'

**K = Black    C = Cyan    M = Magenta    Y = Yellow**